


Solution for sliding gates at private homes

- Encoder-based movement control.
- Complies with the rules on impact forces.
- Set up for operation in case of power outage.
- Self-diagnosing, hardwired safety devices.
- Control board with terminal blocks, dip switches and storage for up to 25 users.
- On-board rolling code decoding.



Dimensions (mm)

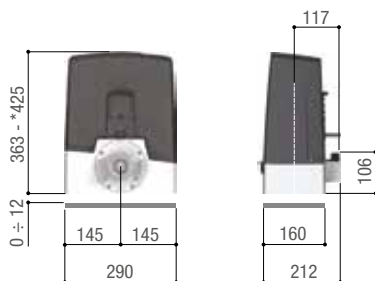

Operational limits

MODELS	801MS-0140
Max. length of leaf (m)	10
Max. weight of leaf (kg)	400
Pinion module	4

Technical characteristics

MODELS	801MS-0140
Protection rating (IP)	44
Power supply (V - 50/60 Hz)	230 AC
Power supply to motor (V)	24 DC
Absorption (A)	7 MAX
Power (W)	170
Duty/cycle (%)	50
Thrust (N)	350
Operating temperature (°C)	-20 ÷ +55