




Solution for access management in private and public settings

- CAME patented device for the management of reserved areas and private accesses.
- Sturdy and impact-resistant steel structure.
- Quick and simple installation.
- Guides to guarantee the chain protection with open passage.
- 24 V DC version available for obstacle detection and chain speed adjustment.

Dimensions (mm)

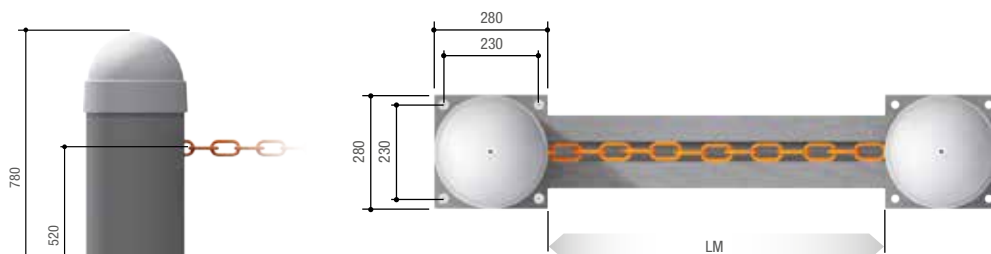

LM = Max. net clearance width

Operational limits

MODEL	CAT-15 (5 mm chain)	CAT-5 (9 mm chain)
Max. net clearance width (m)	16	8

NOTES: Cover color RAL 9006 – Cabinet color ROUGH GRAY code 053 0837

Technical characteristics

MODELS	CAT-X	CAT-X24
Protection rating (IP)	54	54
Power supply (V - 50/60 Hz)	230 AC	230 AC
Power supply to motor (V)	230 AC 50/60 Hz	24 DC
Absorption (A)	2,7	10 Max.
Power (W)	300	240
Duty/cycle (%)	30	HEAVY-DUTY SERVICE
Operating temperature (°C)	-20 ÷ +55	-20 ÷ +55
Motor's heat protection (°C)	150	-