

F4000

Doors up to 2 m




Ideal solution for fitting on swing-leaf and folding doors

- 24 V DC and 230 V AC EN versions tested thanks to the electronic management with encoder.
- Quick and simple installation.
- It can be installed either on the right or left thanks the symmetrical inputs on the gear shaft.
- Protection rating against weathering agents (IP54).
- In the 24 V DC versions it is possible to adjust the maneuvering speed, opening and closing slow-down speeds, and electronic detection of the obstacle.
- Developed with CONNECT technology for remote digital control via gateway or locally via CAME KEY.



Dimensions (mm)

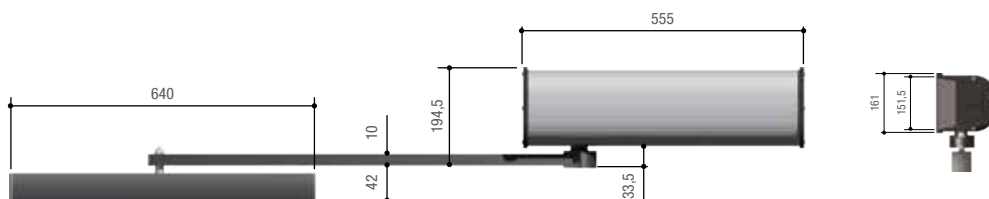

Operational limits

MODEL	F40230E · F4024EP	F4024E
SWING LEAF DOORS		
Max. width of leaf (m)	2	1,5
Max. weight of leaf (kg)	300	200
SINGLE-LEAF FOLDING DOORS		
Max. width of leaf (m)	1,2	1,2
Max. weight of leaf (kg)	200	150

Technical characteristics

MODELS	F40230E	F4024E	F4024EP
Protection rating (IP)	54	54	54
Power supply (V - 50/60 Hz)	230 AC	230 AC	230 AC
Power supply to motor (V)	230 AC 50/60 Hz	24 DC	24 DC
Absorption (A)	1,2	5 max	10 max
Power (W)	235	130	180
Crown turns (rpm)	1,3	1,3	24
Duty/cycle (%)	30	HEAVY-DUTY SERVICE	HEAVY-DUTY SERVICE
Thrust (N)	340	360	470
Operating temperature (°C)	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55
Reduction ratio (i)	1/150	1/150	1/150
Motor's heat protection (°C)	150	-	-

● 230 V AC ● 24 V DC