


## Ideal solution for use in apartment buildings and industrial plants

- 24 V DC gearmotor ideal to ensure heavy-duty service levels.
- Linear design with galvanized steel cabinet with RAL 2004 rough finish.
- Also available made of AISI 304 steel (item G3751 - G6501).



Dimensions (mm)

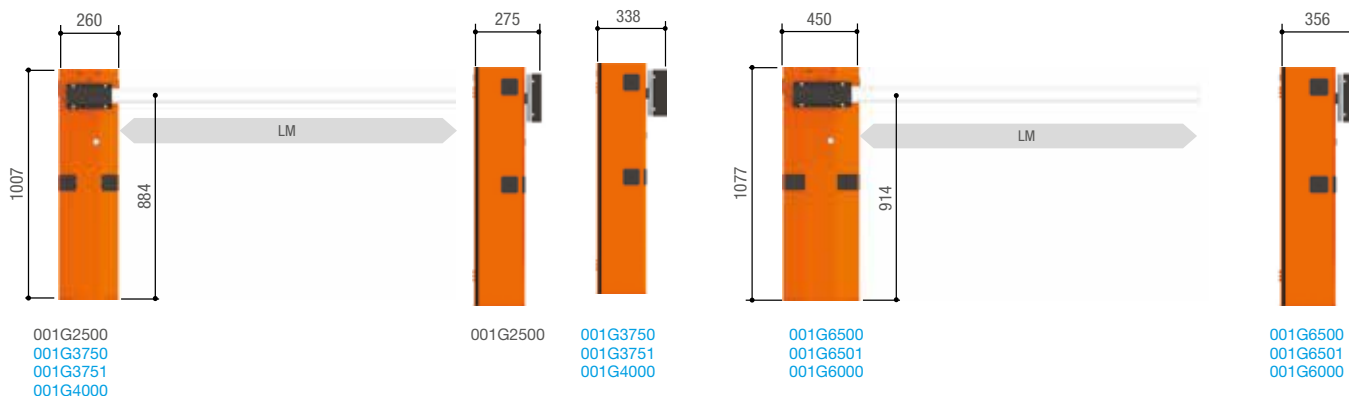

LM = Max. net clearance width

## Operational limits

MODELS	G2500	G3750	G3751	G6500	G6501	G4000	G6000
Max. net clearance width (m)	2,5	3,75	3,75	6,5	6,5	4	6

## Technical characteristics

MODELS	G2500	G3750	G3751	G6500	G6501	G4000	G6000
Protection rating (IP)	54	54	54	54	54	54	54
Power supply (V - 50/60 Hz)	230 AC	230 AC	230 AC	230 AC	230 AC	230 AC	230 AC
Power supply to motor (V)	230 AC 50/60 Hz	24 DC	24 DC	24 DC	24 DC	24 DC	24 DC
Absorption (A)	1	15 Max.	15 Max.	15 Max.	15 Max.	15 Max.	15 Max.
Power (W)	220	300	300	300	300	300	300
Opening time at 90° (s)	4	2 ÷ 6	2 ÷ 6	4 ÷ 8	4 ÷ 8	2 ÷ 6	4 ÷ 8
Duty/cycle (%)	30	HEAVY-DUTY SERVICE	HEAVY-DUTY SERVICE	HEAVY-DUTY SERVICE	HEAVY-DUTY SERVICE	HEAVY-DUTY SERVICE	HEAVY-DUTY SERVICE
Torque (Nm)	70	200	200	600	600	200	600
Operating temperature (°C)	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55
Motor's heat protection (°C)	150	-	-	-	-	-	-