

# GARD PT Brushless

Net clearance up to 3,8 m




## The ideal solution for passage ways with heavy transit flows

- Brushless motor for high performance and silent operation.
- Continuous use tested for 2 million cycles (MCBF - mean cycle between failures).
- Modern design with painted aluminium cabinet with rough finish.
- Available with high visibility red/green LEDs on the crown and on both sides of the boom.
- Boom casing for protection against shearing in opening and closing.
- Available accessory for boom safety release in case of impact for high traffic applications.
- Control board with display.
- Developed with CONNECT technology for remote digital control via gateway or locally via CAME KEY.



## Dimensions (mm)

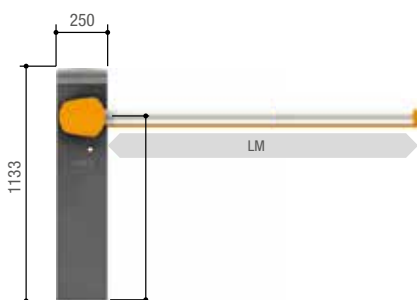

LM = Max. net clearance width



803XA-0180

## Operational limits

MODELS	803BB-0330	803BB-0070
Max. net clearance width (m)	3,8	3,8

## Technical characteristics

MODELS	803BB-0330	803BB-0070
Protection rating (IP)	54	54
Power supply (V - 50/60 Hz)	230 AC	230 AC
Power supply to motor (V)	36 DC	36 DC
Absorption (A)	1,5	1,5
Power (W)	350	350
Opening time at 90° (s)	1,2 ÷ 4	1,2 ÷ 4
Duty/cycle (%)	CONTINUOUS DUTY (with springs and boom up to 3.8 m) INTENSIVE DUTY (without springs and with boom up to 2.5 m)	CONTINUOUS DUTY (with springs and boom up to 3.8 m) INTENSIVE DUTY (without springs and with boom up to 2.5 m)
Operating temperature (°C)	-20 ÷ +55	-20 ÷ +55

● 36 V DC