

KRONO


Gate leaves up to 5 m

Solution for applying in private homes

- Supporting structure in die-cast aluminium.
- Adjustable opening/closing microswitches.
- Built-in emergency release lever.



Dimensions (mm)

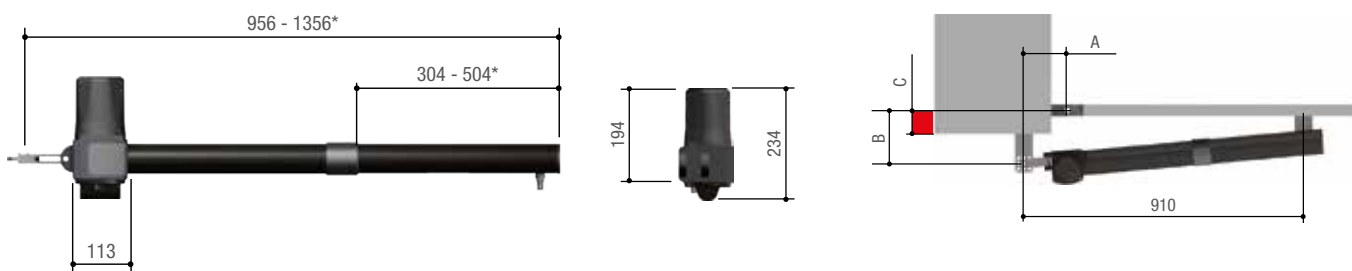

* 001KR510D · 001KR510S

Application dimensions (mm)

MODELS	KR300D · KR300S · KR302D · KR302S KR310D · KR310S · KR312D · KR312S		
	A	B	C Max.
LEAF OPENING (°)			
90	130	130	60
120	130	110	50

MODELS	KR510D · KR510S		
	A	B	C Max.
LEAF OPENING (°)			
90	200	200	120
130	200	140	70

Operational limits

MODEL	KR300D · KR300S · KR302D · KR302S KR310D · KR310S · KR312D · KR312S		
Max. width of leaf (m)	3	2,5	2
Max. weight of leaf (kg)	400	600	800
Max. leaf opening (°)	120		

MODEL	KR510D · KR510S				
Max. width of leaf (m)	5	4	3	2,5	2
Max. weight of leaf (kg)	400	500	600	800	1000
Max. leaf opening (°)	120				

Technical characteristics

MODELS	KR300D	KR300S	KR302D	KR302S	KR310D	KR310S	KR312D	KR312S	KR510D	KR510S
Protection rating (IP)	54	54	54	54	54	54	54	54	54	54
Power supply (V - 50/60 Hz)	230 AC	230 AC	230 AC	230 AC	230 AC	230 AC	230 AC	230 AC	230 AC	230 AC
Power supply to motor (V)	230 AC	230 AC	230 AC	230 AC	230 AC	230 AC	230 AC	230 AC	230 AC	230 AC
Absorption (A)	1,1	1,1	1,35	1,35	1,1	1,1	1,35	1,35	1,1	1,1
Power (W)	240	240	300	300	240	240	300	300	240	240
Maneuvering time at 90° (s)	22	22	15	15	22	22	15	15	34	34
Duty/cycle (%)	30	30	30	30	30	30	30	30	30	30
Thrust (N)	400 ÷ 3000	400 ÷ 3000	400 ÷ 3000	400 ÷ 3000	400 ÷ 3000	400 ÷ 3000	400 ÷ 3000	400 ÷ 3000	400 ÷ 3000	400 ÷ 3000
Operating temperature (°C)	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55
Motor's heat protection (°C)	150	150	150	150	150	150	150	150	150	150

● 230 V AC