

## Clear opening dimensions

- Maximum - Standard version (W) 4000mm x (H) 4000mm

## Frame

- Self-supporting frame without welding
- Anti-corrosion material: galvanized steel with epoxy polyester powder coating
- Semi-rigid polyethylene guides
- Automatic re-insertion of the curtain (both ways)
- Inverted covers, positioned inside the frames, to facilitate access to the integrated control box

## Options

- Stainless steel 304L or 316L
- TRAFICONTROL® flexible guides

## Curtain

- Fire resistance C
- 100% polyester weft, PVC coated and prestressed
- Anti-UV and anti-mould treatment
- Composite tubes with shape memory

## Options

- Row(s) of oblong(s) and vision panel
- MAVISION® customization with logo, image, text
- Triple insulated curtain with thermal insulation UF 2.7
- Fire resistance B

## Functioning

- Opening speed: 2m/s and closing speed: 0.5m/s

## Option

- Inverter for automatic lifting on emergency exit

## Security

- SAFETIME® double safety system: detection system with 3 photocells, combined with automatic closing time control

## Motorization

- Motor integrated in the transom
- Belt drive
- Electronic adjustment of the limit switch via the front panel display
- IP55 stainless steel anti-corrosion brake managed by the electronic board
- Transmission shaft mounted on self-aligning ball bearing

## Control box

- Integrated ABS control box IP40
- Cycle counter

## Options

- IP65 remote ABS control box, for wet areas
- Control by PLC

## Connected card

- Card reprogrammable, scalable and customizable
- Door management program
- Integrated frequency inverter
- USB port for remote assistance (secure data)

## Opening controls

- **Manual:** remote control, pull switch, push button...
- **Automatic:** magnetic loop, cells, radar...


## Electrical supply



# Technical dimensions

## Control box

- Control box power cable: 4G2.5 square 3 phases + ground without neutral
- Head circuit breaker: 16A curve C or 10A curve AM
- Dimensions: (h) 400 x (w) 290+55 x (d) 190 mm

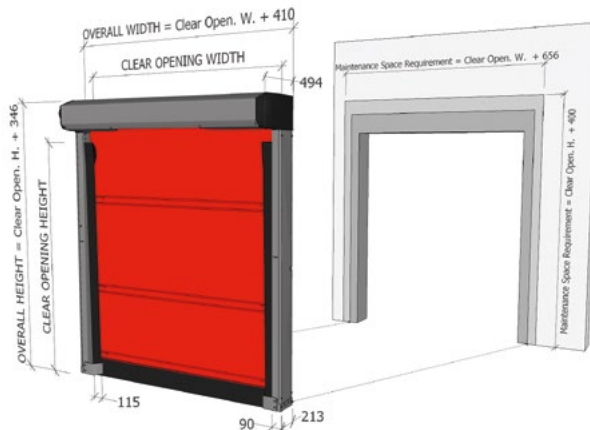


Dimensions and specifications are subject to change without notice.

## Curtain



Oblongs



Vision panel



## Colours

### Standard RAL for frame and curtain



Other colours on demand.

Subject to supplier stocks. RAL colours may vary.